

The base for your electromobility

ULF – Universal charging station foundation


Integrated charging infrastructure

Intelligent charging infrastructure for powering vehicles in the commercial and public spheres:

Commercial sphere

- companies
- hotels
- gastronomy
- housing industry




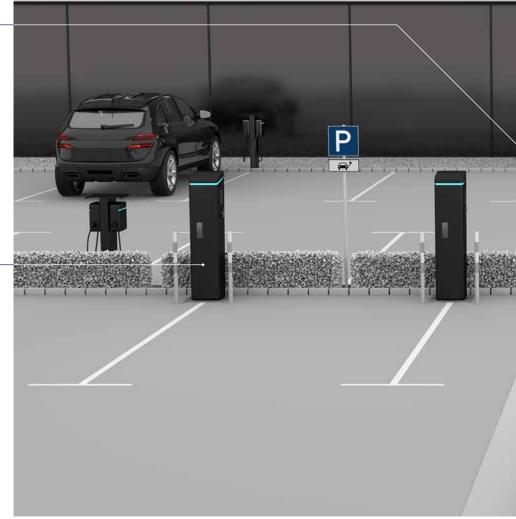

Public sphere

- cities
- municipalities
- public institutions



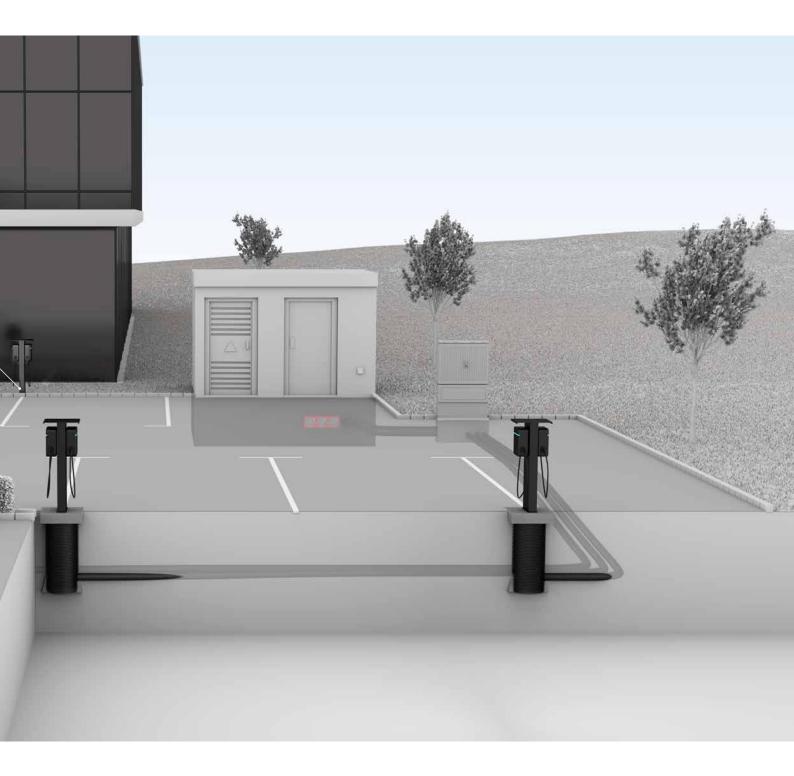

The clever foundation system

Companies, service providers, hotels and other semi-public institutions will also have greater demand for charging stations in the future. For the predicted ramp-up of electromobility, it is therefore necessary for the corresponding charging infrastructure to be expanded. For this purpose, an increased number of charging stations is vital in view of the increasing demand for electric vehicles. With the universal charging station foundation, Hauff-Technik has created an innovative and universal foundation for the construction of charging points. ULF offers a foundation solution for various types of charging stations and charging pedestals as well as for different installation situations. ULF is used in parking lots and charging points in public, semi-public as well as private areas.

Universal charging station foundation

Functional principle

ULF is a universal foundation for charging stations and charging pedestals. Power and data cables are introduced via a conduit connection.

The charging station or pedestal is attached and connected to the foundation plate.

mounting options

screwing or dowelling possible on site

foundation slab

flexible and safe installation of charging stations

foundation pipe

allows alignment of the foundation and a flexible arrangement of the media lines

connection of further ULFs possible

empty conduit

connection option for empty conduits

concrete foundation

attachment of the ULF

charging station

data cable

power cable

electricity from the house connection/transformer station

Foundation comparison


	Precast foundation	ULF	Foundation concreted on-site
Features Weight	100 kg – 900 kg	< 60 kg	_
Chemical resistance	depending on the concrete quality	acid and alkali resistance	depending on the concrete quality
Surface	smooth and even	very smooth and even	depending on the processor
Frost and de-icing salt resistance	only with special concrete	resistant through polymer con- crete (FX4)	only with special concrete
Height adjustment	-	can be cut to length on site	_
Water absorption	depending on the concrete quality	low	depending on the concrete quality
Installation			
Installation complexity	low	low	very high
Formwork work	_	_	laborious/complex
Laying foundation	only possible with crane/exca- vator	1 person	2 persons
Installation time	fast	fast	time consuming
Transport costs	very high	low	low
Cable routing	integrated	integrated	on site

Installation

Variety of charging station models	type-related	flexibly applicable	type-related
Mounting options	threaded sleeves, tie rods, con-	threaded sleeves, tie rods, con-	concrete screws, dowels, tie
	crete screws, dowels	crete screws, dowels	rods

Electromobility in the private sphere

ETGAR is a complete system for distributing the power supply to the entire property. The electricity is routed out of the building via the building services outlet and distributed on the property. The ETGAR foundation box serves as a ready-to-connect foundation system for smaller charging pedestals. The universal charging station foundation ULF is used for larger charging stations.

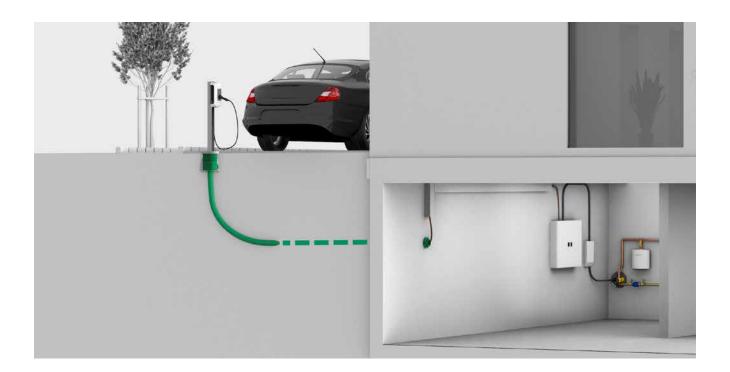




Single building services outlet for connecting an electronic device.



Electromobility system overview

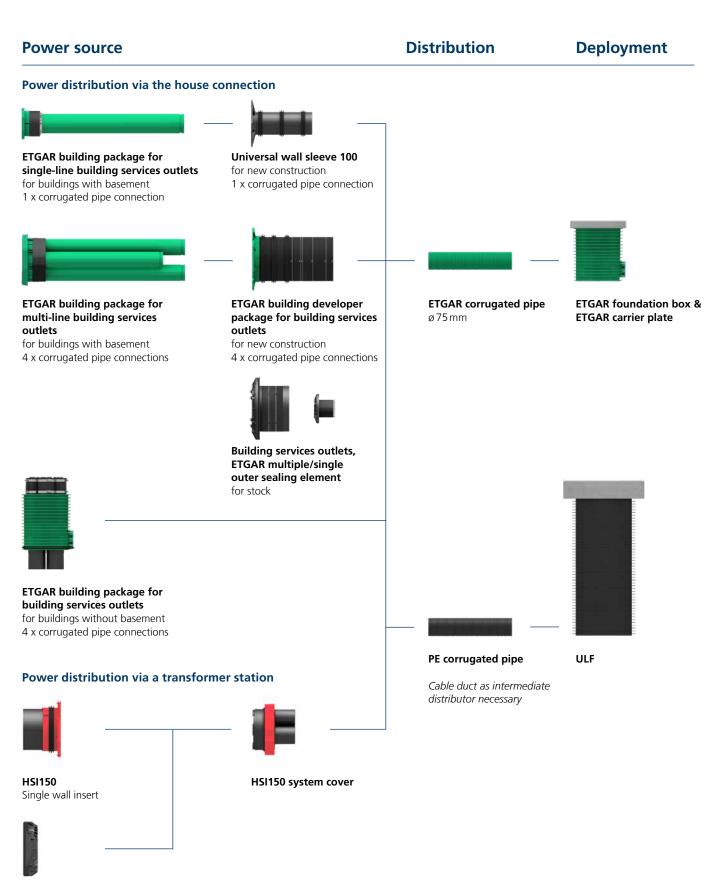

HSI150 DFK polymer flange for dowelling

ULF_Elektromobilität_EN_230622

Universal charging station

for the installation of charging stations and charging pedestals

ULF

Universal foundation solution for installing charging stations and charging pedestals. Option for mounting on the polymer concrete slab. Connection of power and data cables via an empty pipe connection.

Features and benefits

foundation

• universal foundation system for different charging stations and charging pedestals

- adaptation option for empty conduits
- lightweight
- can be installed easily and quickly on-site

Scope of delivery:1 x ULF with blind cover

- Properties
- weight: ULF470: 54 kg, ULF380: 38 kg

Dimensions:

- total length: 850 mm
- height foundation slab: 100 mm
- foundation slap opening: ULF470: 150 mm, ULF380: 110 mm

NЛ-		ria	Ŀ.
1110	ale	Пa	

- foundation slab: polymer concrete
- foundation pipe: PE

Size	Foundation pipe Øi (mm)	Article code	Article number
380 mm x 380 mm	250	ULF380	3030490218
470 mm x 470 mm	300	ULF470	3030490219

Hauff-Technik GmbH & Co. KG

Robert-Bosch-Straße 9 89568 Hermaringen, GERMANY

Tel. +49 7322 1333-520 Fax +49 7322 1333-999

ht.international@hauff-technik.de



