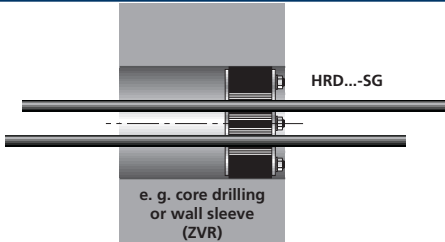
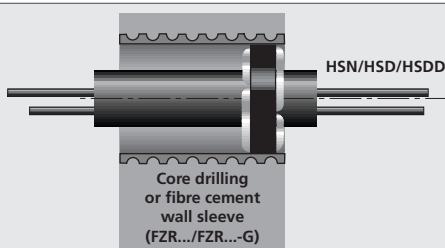
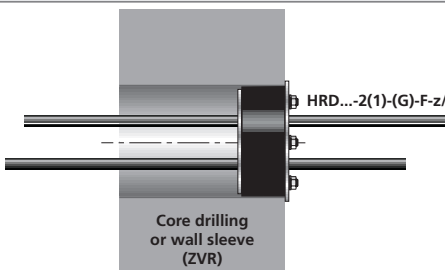
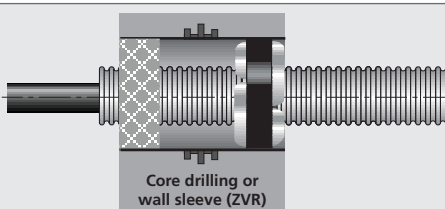


Always. Reliable. Tight.

For cable und pipe (duct) seals

SYSTEM OVERVIEW

PRESS SEALS

INSIDE OF BUILDING	WALL	OUTSIDE OF BUILDING
	 <p>HRD...-SG</p> <p>e. g. core drilling or wall sleeve (ZVR)</p>	<p>Standard press seal for cables split with segmented ring technology HRD...-SG</p> <ul style="list-style-type: none"> • sealing width 40 mm • for quick adaptation to cable diameter on-site
	 <p>HSN/HSD/HSDD</p> <p>Core drilling or fibre cement wall sleeve (FZR.../FZR...-G)</p>	<p>Standard press seals for pipes installed in fibre cement pipe (closed FZR.../split FZR...G) or core drilling holes</p> <ul style="list-style-type: none"> • HSN = sealing width 20 mm • HSD = sealing width 40 mm • HSDD = sealing width 80 mm
	 <p>HRD...-2(1)-(G)-F-z/d</p> <p>Core drilling or wall sleeve (ZVR)</p>	<p>HRD...-2(1)-(G)-F-z/d individual press seal closed/split with overlapping flange</p> <ul style="list-style-type: none"> • sealing width 30 mm (1) non-pressing water • sealing width 60 mm (2) pressing water
	 <p>Core drilling or wall sleeve (ZVR)</p>	<p>ADS sealing set e.g. for corrugated cable ducts with ISO ring and clip rings inside cementcoated wall sleeve ZVR...</p>

Always. Reliable. Tight.

For cable und pipe (duct) seals

SYSTEM OVERVIEW

PRESS SEALS

INSIDE OF BUILDING	WALL	OUTSIDE OF BUILDING
<p>HRD...-1(G)-z/d individual press seal closed/split (G)</p> <ul style="list-style-type: none"> sealing width 30 mm (1) non-pressing water 		<p>Sealing in front of the wall flange (HRD...F closed/HRD-FG split) with press seal HRD...-2(1)-(G)-z/d individual press seal closed/split (G)</p> <ul style="list-style-type: none"> sealing width 30 mm (1) non-pressing water sealing width 60 mm (2) pressing water
<p>HRD...-2(G)-z/ individual press seal closed/split (G)</p> <ul style="list-style-type: none"> sealing width 60 mm (2) pressing water 		<p>Flange wall sleeve for buildings with sealing membranes in acc. with DIN 18195, Part 9 (black tank) with HRD...-2(1)-(G)-z/d individual press seal closed/split (G)</p> <ul style="list-style-type: none"> sealing width 30 mm (1) non-pressing water sealing width 60 mm (2) pressing water

Other special solutions on request!

Hauff-Technik GmbH & Co. KG

Robert-Bosch-Straße 9
89568 Hermaringen, GERMANY

Tel. +49 7322 1333-0
Fax +49 7322 1333-999

office@hauff-technik.de