

# Single-line basic insert

For buildings without a basement

## ESH Basic FUBO SR1 EBT

: 3030473606, GTIN: 4052487241212



- **Variable height adaptation to the finished floor level**
- **easy integration of the vapour barrier using the adhesive ribbon**

For the feeding in and sealing of supply lines (power, water, telecommunications or gas) through the base slab. Is supplemented with separately available spiral hose system, seal insert and utility sealing element.



### Advantages:

- Continuous duct connection up to the main supply lines at the edge of the property possible
- The individual frame segments can be snapped together



### Scope of delivery:

- 1 piece basic insert with installation fixture

### Dimensions:

- Width: 222 mm
- Length: 222 mm
- Height: 270 mm

### Properties:

- DVGW-certified
- Can be supplemented with a flexible spiral hose system

## Application range:

- DIN 18533 W1-E
- Waterproof concrete stress class 1, waterproof concrete stress class 2

## Material:


- Insert: ABS
- Installation fixture: St37

## Tightness:

- gastight and watertight to 1.0 bar

## Tests/Standards:

- DVGW VP 601

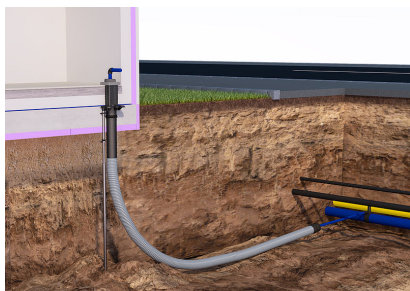

Spiral hose system



Seal insert for basic insert