

# Plastic spiral hose

## for cable entry system


### Hateflex14090/12000

Article no.: 3030590166, GTIN: 4052487247597



- **flexible plastic spiral hose (peak compressive strength class 450 N DIN EN 61386-24)**
- **a pressure-tight cable entry system (for up to 2.5 bar external pressure) can be created using the associated connection components.**

Flexible and very rugged plastic spiral hose. A pressure-tight cable entry system can be created with the associated connection components.

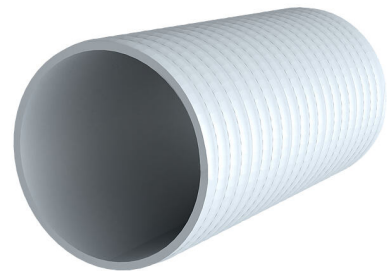

Picture may differ from selected product

## FACTS

### Advantages:

- Empty conduit route without sleeve available up to 25 m
- Empty conduit system that can be built over
- Smooth inner surface for gentle cable pulling

### Scope of delivery:

- Coils in lengths of 25 m (special lengths are available in 0.5 m sections)
- includes closing cover

## Dimensions:

- ID: 91 mm  $\pm$  1 mm
- OD: 104 mm  $\pm$  1 mm

## Properties:

- Peak compressive strength: Class 450N (DIN EN 61386-24)
- Installation temperature: +5°C to +50°C
- Weight: 4000 g/m
- Sliding friction coefficient of inner surface: 0.53 (DIN EN ISO 8295)
- Installation temperature from +5° to + 50°C
- Weather-proof, UV-resistant and rot-resistant
- Resistant to brine and seawater

## Material:

- Hard PVC/soft PVC

## Tightness:

- gastight and watertight to 2.5 bar

# FEATURES

Length (m): 12.0

# PICTURES

