


# Combined building entry for gas for buildings with a basement

## HSB SKIBFGTN-PESS-PE100-TE DN80 BL1480

: 1990800010, GTIN: 4052487054430

Combined building entry for gas with gas valve manufactured by Schuck, DN 80, for use in core drills or wall sleeves ID 150 mm.

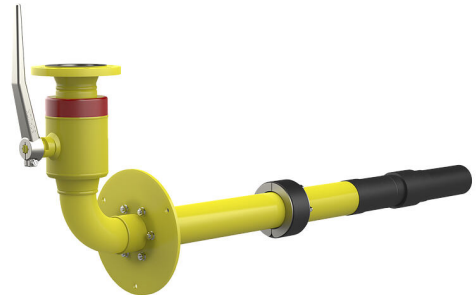

### Advantages:

- quick and easy installation
- Dry installation

### Scope of delivery:

- 1 piece Combined building entry for gas manufactured by Schuck, DN 80, includes protection against pulling out and twisting and pre-assembled sealing elements

### Dimensions:

- Core drill/wall sleeve ID: 150 mm
- Wall thickness: 240 - 800 mm

### Application range:

- Waterproof concrete stress class 1, waterproof concrete stress class 2

### Material:

- Seal insert: stainless steel V2A (AISI 304L)
- Rubber: EPDM

## Tightness:

- gastight and watertight to 1.0 bar

