

Basic variant with inner seal for district heating

for buildings with a basement


MSH FW Basic GV2

Article no.: 1933002000, GTIN: 4052487126588



- **Visual and physical installation control thanks to integrated inspection opening**
- **integrated leak test equipment for double walls/element walls for certainty during installation**

Gastight and watertight building entry for district heating, water, power and telecommunications services. Basic variant 2 with inner seal 60 mm sealing width. As this is a modular system, the outer seal can be freely selected as appropriate for the type of wall.

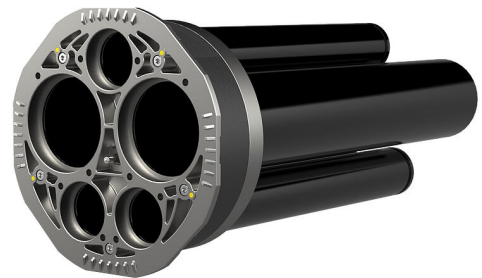

Picture may differ from selected product

FACTS

Advantages:

- Seals all supply lines through one entry
- Continuous duct connection up to the main supply lines at the property boundary possible
- All services are fed in and sealed separately
- The arrangement of the individual services is flexible

Scope of delivery:

- 1 piece of Inner seal
- 5 pieces of sleeve pipes
- 1 piece of test valve (pre-mounted)
- 4 M8x45 screws for district heating sealing elements
- 6 pieces M8x50 screws for rafter sealing elements

Dimensions:

- Inner seal with 60 mm sealing width
- Compatible with core drill/wall sleeve: ID: 298 mm - 303 mm
- Maximum wall thickness: 500 mm (special lengths on request)

Properties:

- Also required: closed sealing elements and an or several outer sealing elements (as appropriate for wall type)
- Module 6 (outer sealing element with 90 mm sealing surface) produces a variant that can be tested in applications in double walls/element walls

Application range:

- Water exposure class DIN 18533: W1-E and W2.1-E
- Waterproof concrete stress class 1 and 2

Material:

- Inner seal: die-cast aluminium/EPDM
- Sleeve pipes: PVC
- Screws and washers: stainless steel V2A (AISI 304L)

Tightness:

- gastight and watertight to 1.0 bar

FEATURES

Item: Grundvariante mit Innenabdichtung für Fernwärme

PICTURES

