

KG-FIX

Wall collar


KGF125

Article no.: 3030377635, GTIN: 4052487228855



- **quick, tool-less assembly**

Water barrier flange for pressure-tight integration of waste water pipes in floor slabs.

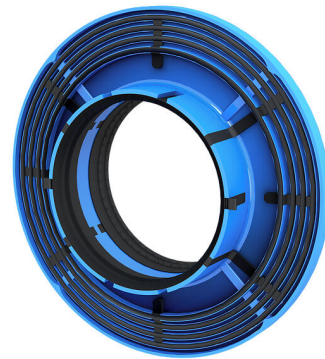

Picture may differ from selected product

FACTS

Advantages:

- high dimensional stability thanks to two components injection molding

Properties:

- Suitable for all standard smooth pipes
- 2 TPE profile double sealings

Application range:

- Waterproof concrete stress class 1, waterproof concrete stress class 2

Material:

- ABS/TPE



Tightness:

- pressure-rated up to 5,0 bar – equivalent to 50 m of water column
- radon tight

FEATURES

| | |
|-----------------------------------|-----|
| Wall collar OD (mm): | 227 |
| suitable for medium pipe OD (mm): | 125 |
| Packing unit: | 1 |

PICTURES

