


# Earthing entry

## for retrofit installation

### HEA ND M16/600

Article no.: 1700050121, GTIN: 4052487178990

For retrofit installation in existing walls with perimeter insulation. Sealing to the wall is provided on both sides by a surface seal, which is pressed to the wall with nuts. Flat or round earthing straps can be connected using a connection lug with cross clamp.

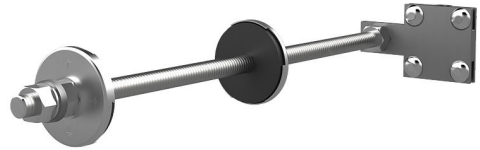

Picture may differ from selected product

## FACTS

### Advantages:

- Retrofit earthing systems
- Dry sealing system (without mortar)

### Scope of delivery:

- 1 piece of connection lug and cross-clamp

### Dimensions:

- Contact washer: Ø 72 mm
- Conductor core: M16 threaded rod
- Required drill hole: 20 mm
- For wall thicknesses up to 400 mm, thicker walls on request
- For perimeter insulation: up to 200 mm

### Application range:

- Waterproof concrete stress class 1 and 2

## Material:

- All metal parts: stainless steel V4A (AISI 316L)
- Seal: EPDM

## Tests/Standards:

- DIN 18014
- DIN EN 62305-3
- VDE 0185-305-3 (with lightning protection application)

## FEATURES

Maximum wall thickness:	600
Threaded bolt:	M16