

Standard press seal

with segmented ring technology


HRD150 SG 4x8-30+6x4-16,5 b40 A2/EPDM

Article no.: 2700106500, GTIN: 4052487000215



- **Segmented ring technology for adjustment on-site to pipe diameters**

Press seal for sealing cables in core drills or sleeves Split design for sealing new installed cables or cables that have already been installed.

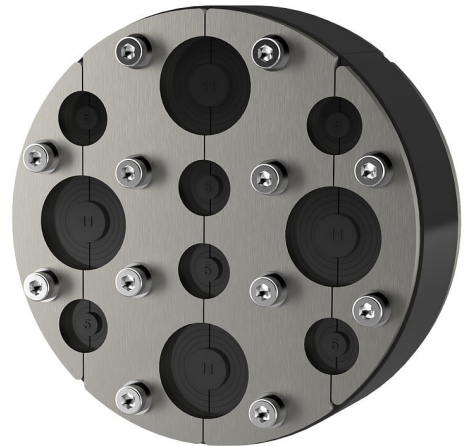

Picture may differ from selected product

FACTS

Advantages:

- Unused openings factory-sealed with blind plugs
- split seal for retrofit installation
- available from stock

Scope of delivery:

- Blind plugs
- 1 piece of lubricant stick

Dimensions:

- Sealing width: 40 mm
- Press plates: 5 mm



Properties:

- FHRK-certified

Application range:

- Water exposure class DIN 18533: W1-E, W2.1-E and W2.2-E
- Waterproof concrete stress class 1 and 2

Material:

- Press plates, screws, nuts and washers: rust-free stainless steel V2A (AISI 304L), (V4A (AISI 316L) on request)
- Rubber: EPDM

Tightness:

- gastight and watertight
- radon-proof

FEATURES

| | |
|--|----------------|
| Wall sleeve/core drilled hole ID (mm): | 150 |
| Number of cables/medium overall: | 10 |
| Openings: | 4 6 |
| Carrier pipe Øa (mm): | 8-30 4-16,5 |

PICTURES

