

Membrane injection system

for buildings without a basement

MIS60S 1x30-34 BL1300 Set10

Article no.: 3030382135, GTIN: 4052487230131



- **universal building entry with membrane injection system for angled drill holes through floor slabs or walls**
- **Controlled resin discharge through slotted membrane hose**
- **sealing lips ensure gentle seal for cables/pipes**



Picture may differ from selected product

Suitable for angled installation through the wall or floor slab.

FACTS

Advantages:

- Quick to assemble in just a few minutes
- No repair of the basement waterproofing in accordance with DIN 18533 necessary
- Variable sealing configuration thanks to pre-mounted sealing inserts

Scope of delivery:

- 1 packing unit:
- 10 pieces of MIS 60S
- 10 pieces of wall terminator element (only for communication variant)
- 10 pieces of wall rosette (only with electricity variant)
- 10 pieces 2-component resin Resinator, 150 ml
- 1 piece of quick tensioning device MIS60 SVS

Dimensions:

- For core drills Ø: 62 - 65 mm
- Overall length: 1300 mm

Application range:

- Water exposure class DIN 18533: W1-E
- Waterproof concrete stress class 1 and 2

Material:

- Flange, seal insert, counter-bearing and adapter: EPDM
- Resin injection hose: PE
- Wall rosette: PE
- Pipe: PVC-U
- Wall terminator element: Flame-retardant polycarbonate
- Quick tensioning device: glass fibre reinforced polyamide/ABS

Tightness:

- gastight and watertight to 1.0 bar


FEATURES

| | |
|-----------------------------------|-------------|
| Number of cables/medium: | 1 |
| suitable for medium pipe OD (mm): | 30 - 34 |
| Overall length (mm): | 1300 |
| Wall thickness (mm): | 200 - 1.200 |

PICTURES



ACCESSORIES REQUIRED

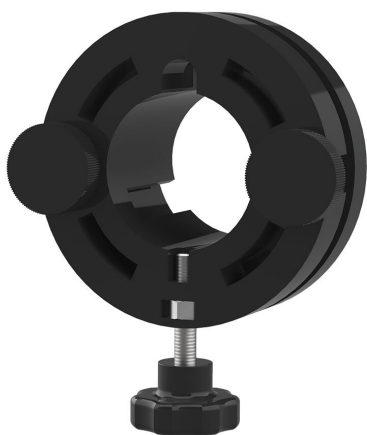

Quick tensioning device



Cartridge gun