

Single-line basic insert

for buildings without a basement

ESH Basic FUBO SR1 EBT

Article no.: 3030473606, GTIN: 4052487241212



- **variable height adaptation to the finished floor level**
- **easy integration of the vapour barrier using the adhesive flange**

For the feeding in and sealing of supply lines (power, water, telecommunications or gas) through the base slab. Is supplemented with separately available spiral hose system, seal insert and utility sealing element.



Picture may differ from selected product

FACTS

Advantages:

- Continuous duct connection up to the main supply lines at the property boundary possible
- The individual frame segments can be snapped together

Scope of delivery:

- 1 piece of basic insert with installation fixture

Dimensions:

- Width: 222 mm
- Length: 222 mm
- Height: 270 mm



Properties:

- DVGW-certified
- for setting in concrete in the floor slab – also for buildings with a basement, e.g. on a slope
- Can be supplemented with a flexible spiral hose system

Application range:

- Water exposure class DIN 18533: W1-E
- Waterproof concrete stress class 1 and 2

Material:

- Insert: ABS
- Installation fixture: St37

Tightness:

- gastight and watertight to 1.0 bar


Tests/Standards:

- DVGW VP 601

FEATURES

Item: Einsparten-Rohbauteil

PICTURES

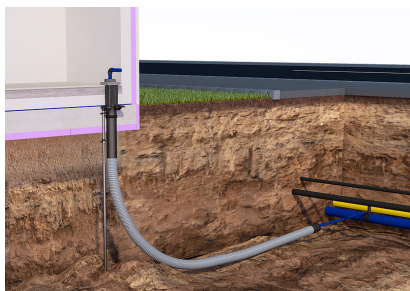

ACCESSORIES REQUIRED



Spiral hose system



Seal insert for basic insert