

# System cover


cable seal with cold shrink-fit method

## HSI90 D3x32 KS

: 2206050060, GTIN: 4052487061124



- **Mechanical fixing (bayonet) and seal (clamping nut) act independently**
- **Bayonet system with return lock and locking screw connection (for protection against automatic opening)**

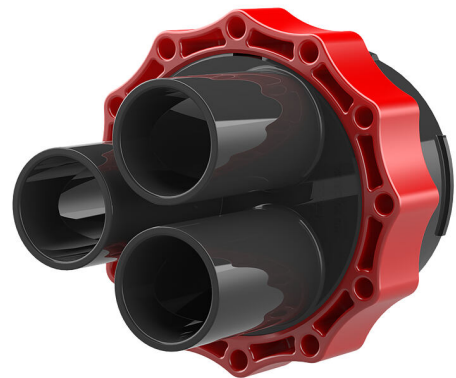

For use in wall insert and aluminium flange HSI90. The cold shrink sleeves support a wide area of application. They are shrunk onto the cables by the system cover socket without tools. Empty system cover sockets can be sealed with blind plugs.

### Advantages:

- wide area of application
- Best possible shrink result thanks to centring straps
- Gentle sealing
- Shrink-fit method without tools
- Permanently elastic shrink tubing

### Scope of delivery:

- Cold shrink sleeves
- Centring strap for HSI 90-D1/75-KS

### Properties:

- The cold shrink-fit method is used on the outside of the building

## Material:

- System cover with socket: polycarbonate
- Clamping nut: PC/PBT blend
- Shrink tubing: EPDM
- Centring strap: EPDM

## Tightness:

- gastight and watertight to 2.0 bar

Socket diameter:	32
Number of cables/medium:	3
Area of application cable OD (mm):	19-30



Flexible socket wrench