

System cover


cable seal with cold shrink-fit method

HSI90 D6x20 KS

: 2206050070, GTIN: 4052487061131



- **Mechanical fixing (bayonet) and seal (clamping nut) act independently**
- **Bayonet system with return lock and locking screw connection (for protection against automatic opening)**

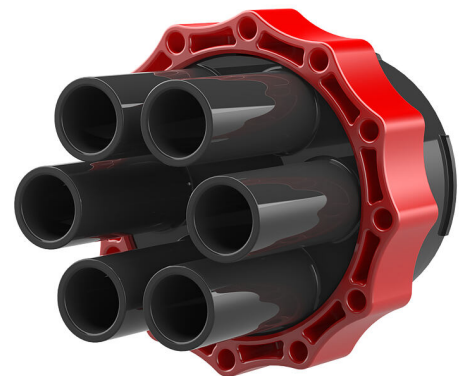

For use in wall insert and aluminium flange HSI90. The cold shrink sleeves support a wide area of application. They are shrunk onto the cables by the system cover socket without tools. Empty system cover sockets can be sealed with blind plugs.

Advantages:

- wide area of application
- Best possible shrink result thanks to centring straps
- Gentle sealing
- Shrink-fit method without tools
- Permanently elastic shrink tubing

Scope of delivery:

- Cold shrink sleeves
- Centring strap for HSI 90-D1/75-KS

Properties:

- The cold shrink-fit method is used on the outside of the building

Material:

- System cover with socket: polycarbonate
- Clamping nut: PC/PBT blend
- Shrink tubing: EPDM
- Centring strap: EPDM

Tightness:

- gastight and watertight to 2.0 bar

| | |
|------------------------------------|-------|
| Socket diameter: | 20 |
| Number of cables/medium: | 6 |
| Area of application cable OD (mm): | 14-18 |



Flexible socket wrench