

# Standard press seal


## HSD125 SG 1x50/60/74/90 b40 A2/EPDM

Article no.: 3030486544, GTIN: 4052487242363



- **Visual and physical installation control thanks to integrated inspection opening**
- **Segmented ring technology for adjustment on-site to pipe diameters**

For sealing new or already installed pipes in core drill holes or wall sleeves. Can be adapted to the most common cable diameters on site.

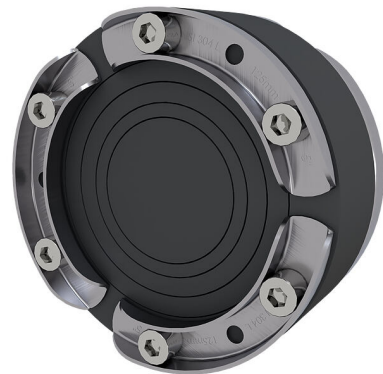

Picture may differ from selected product

## FACTS

### Advantages:

- Split as standard for retrofit installation

### Dimensions:

- Sealing width: 40 mm

### Properties:

- U-profile: maximum stability for press segments

### Material:

- Press plates, screws and nuts: rust-free stainless steel V2A (AISI 304L)
- Rubber: EPDM



## Tightness:

- gastight and watertight
- radon-proof

## FEATURES

Wall sleeve/core drilled hole ID (mm):	125
Openings:	1
Carrier pipe $\varnothing_a$ (mm):	50/60/74/90
Packing unit:	1