


Always. Reliable. Tight.

Renovation wall sleeve

SFR100/1000

Article no.: 0930000110, GTIN: 4052487025324

For retrofit installation in brickwork or concrete walls.

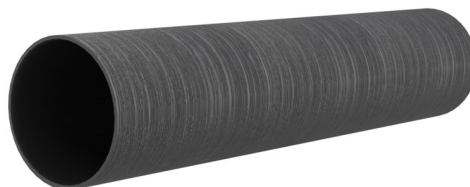

Picture may differ from selected product

FACTS

Application range:

- DIN 18533 W1.1-E, DIN 18533 W1.2-E

Advantages:

- Can be cut to length on site
- Compact design accommodates smallest possible drill holes/break-throughs

Dimensions:

- Wall thickness: 4, 5 and 6 mm

Properties:

- Roughened surface for connection to wall
- Break-resistant, inherently stable
- For retrofit installation in break-throughs

Material:

- Pipe: PVC

FEATURES

Wall sleeve ID (mm):	100
Wall sleeve OD (mm):	110
Optimal application range medium pipe OD (mm):	0 - 63
Max. possible application range medium pipe OD (mm):	0 - 76
Minimum drilling (mm):	150
Wall thickness (mm):	1000

PICTURES

