


Always. Reliable. Tight.

# Renovation wall sleeve

## SFR200/1000

Article no.: 0930000260, GTIN: 4052487025485

For retrofit installation in brickwork or concrete walls.

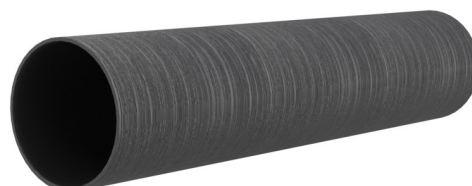

Picture may differ from selected product

## FACTS

### Application range:

- DIN 18533 W1.1-E, DIN 18533 W1.2-E

### Advantages:

- Can be cut to length on site
- Compact design accommodates smallest possible drill holes/break-throughs

### Dimensions:

- Wall thickness: 4, 5 and 6 mm

### Properties:

- Roughened surface for connection to wall
- Break-resistant, inherently stable
- For retrofit installation in break-throughs

### Material:

- Pipe: PVC

# FEATURES

Wall sleeve ID (mm):	200
Wall sleeve OD (mm):	214
Optimal application range medium pipe OD (mm):	110 - 162
Max. possible application range medium pipe OD (mm):	0 - 171
Minimum drilling (mm):	250
Wall thickness (mm):	1000

# PICTURES

