

Always. Reliable. Tight.

Modular seal


10xGKD525 EPDM50

Article no.: 1410052510, GTIN: 4052487146159



- **With integrated installation control - no torque control key required**
- **No retightening required**
- **Nuts moulded into the pressure plate, therefore no loose parts**

For sealing of newly to install pipes or already installed pipes inside core drilled holes or wall sleeves. The modular structure allows installation on all kind of pipes and diameter combinations.

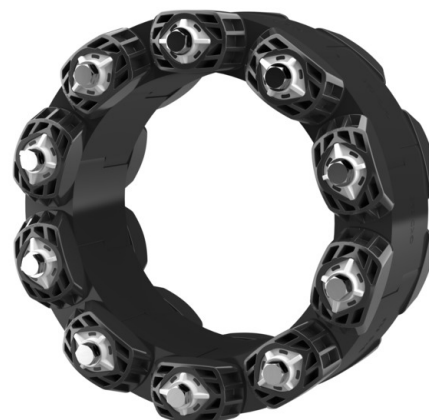

Picture may differ from selected product

FACTS

Application range:

- Standing seepage water, Pressurised water, Waterproof concrete stress class 1

Advantages:

- Optimized bolt geometry
- Made in Germany
- Available from stock
- Suitable for retrofit sealing

Scope of delivery:

- Lubricating stick

Material:

- Rubber: EPDM or NBR
- Bolts and nuts: Stainless steel V4A (AISI 316 L)
- Press plates: glass fibre reinforced polyamide

Tightness:

- Gas- and watertight

FEATURES

Min. annular space (mm):	58
Max. annular space (mm):	63,5
Min. carrier pipe \varnothing_o (mm):	177,8
Max. carrier pipe \varnothing_o (mm):	1230
Required wall thickness (mm):	165
Number of segments:	10

PICTURES

