


Always. Reliable. Tight.

Fixed/loose flange wall sleeve galvanised for retrofit dowelling for black tank

FLFA 1x300/80/0 DIN18533 A3C

Article no.: 2500410300

For dowelling with wall sleeves, core drills or breakthroughs.

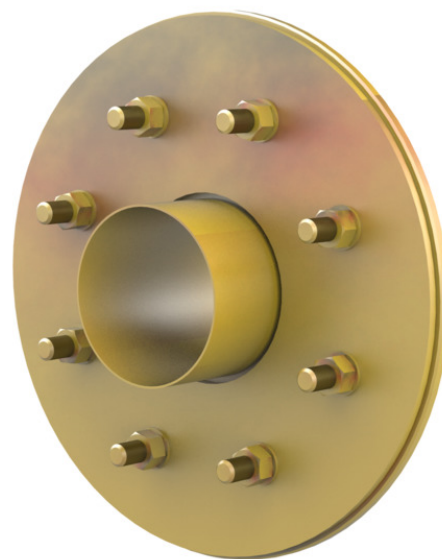

Picture may differ from selected product

FACTS

Application range:

- DIN 18533 W2.1-E, DIN 18533 W2.2-E

Scope of delivery:

- Fixed/loose flange wall sleeve
- Fastenings for concrete
- Nuts

Dimensions:

- Standard upper length: 80 mm
- Design according to DIN 18533 includes: underground structural components. Standard fixed flange $\varnothing a$ equal to the relevant wall sleeve $\varnothing i$ + approx. 330 mm (for one passage; see brochure for details)

Material:

- Fixed/loose flange wall sleeve steel galvanised (gv)
- Fastenings: V4A (AISI 316L)
- Nuts: Steel galvanised (gv)

Tightness:

- Gastight and watertight

FEATURES

Wall sleeve ID (mm) D1:	300 *
Wall sleeve \varnothing (mm) D2:	630
Wall sleeve \varnothing (mm) D3:	620
Optimal application range OD (mm):	200 - 225
Max. possible application range \varnothing (mm):	0 - 250

PICTURES

