


# Fixed/loose flange wall sleeve galvanised

for retrofit dowelling for black tank

FLFA1x300/80/0 DIN18533 St-A3C

Article no.: 3030502695, GTIN: 4052487248624

For fixing in front of wall sleeves, core drills or breakthroughs.

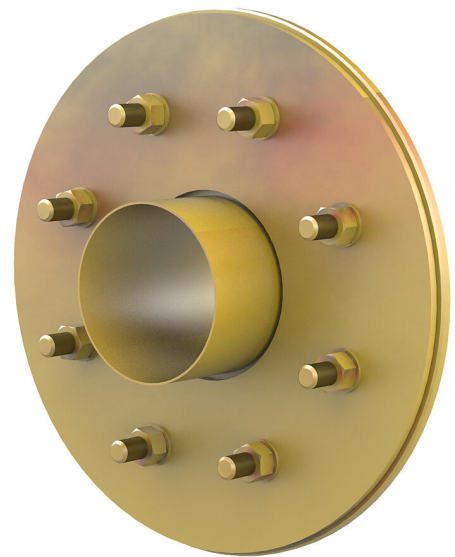

Picture may differ from selected product

## FACTS

### Scope of delivery:

- 1 piece of fixed/loose flange wall sleeve
- Fastenings for concrete
- Nuts

### Dimensions:

- Standard upper length: 80 mm
- Design in accordance with DIN 18533 includes: components in contact with the soil
- Standard fixed flange  $\varnothing a$  equal to the relevant wall sleeve  $\varnothing i$  + approx. 330 mm (for one passage)

## Application range:

- Water exposure class DIN 18533: W1-E, W2.1-E and W2.2-E

## Material:

- Fixed/loose flange wall sleeve steel galvanised (gv)
- Fastenings: stainless steel V4A (AISI 316L)
- Nuts: Steel galvanised (gv)

## Tightness:

- gastight and watertight

## FEATURES

Wall sleeve ID (mm):	300
Fixed flange OD (mm):	630
Loose flange OD (mm):	620
Wall sleeve wall thickness (mm)	2
S:	

## PICTURES



## ACCESSORIES REQUIRED



Rubber inlays