

# System cover

Cable seal with cold shrink technology


## HSI90 D3x32 KS

Article no.: 2206050060, GTIN: 4052487061124



- **Mechanical fixing (bayonet) and sealing (clamping nut) act independently**
- **Bayonet system with backstop and counter screw connection (prevents self-opening)**

For use in wall insert and polymer flange HSI90. The cold shrink sleeves offer a wide range of applications and are shrunk onto the cables by the system cover socket without tools. Unused system cover sockets can be sealed with blind plugs.

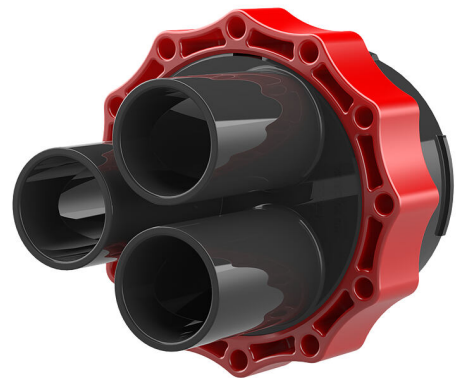

Picture may differ from selected product

## FACTS

### Advantages:

- Wide range of applications
- Optimal shrink result due to centering straps
- Gentle sealing
- Tool-free shrink-fit method
- Permanently elastic cold shrink tubing

### Scope of delivery:

- cold shrink sleeves
- Centring strap for HSI 90-D1/75-KS

### Properties:

- The cold shrink-fit method is used on the outside of the building

## Material:

- System cover with socket: polycarbonate
- Clamping nut: PC/PBT blend
- Cold shrink tubing: EPDM
- Centring strap: EPDM

## Tightness:

- gastight and watertight to 2.0 bar

## FEATURES

Socket diameter:	32
Number of cables/medium:	3
Area of application cable OD (mm):	19-30

## ACCESSORIES REQUIRED



Flexible socket wrench