

System cover


cable seal with cold shrink-fit method

HSI150 D1x80 KS

: 2102100010, GTIN: 4052487055253



- **Mechanical fixing (bayonet) and seal (clamping nut) act independently**
- **Bayonet system with return lock and locking screw connection (for protection against automatic opening)**

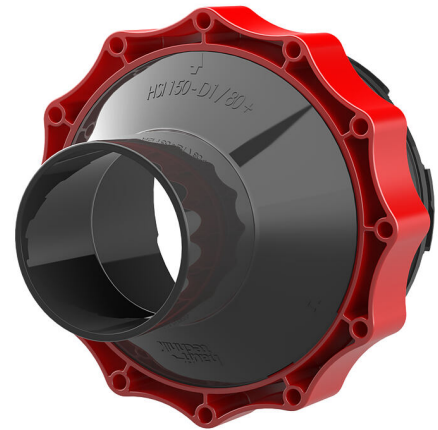

For use in wall insert and plastic flange HSI150. The cold shrink sleeves support a wide area of application. They are shrunk onto the cables by the system cover socket without tools. Empty system cover sockets can be sealed with blind plugs.

Advantages:

- wide area of application
- Best possible shrink result thanks to centring straps
- Gentle sealing
- Shrink-fit method without tools
- Permanently elastic shrink tubing



Scope of delivery:

- Cold shrink sleeves
- Centring strap for HSI 150-D1/80-KS and HSI 150-D3/58-KS

Properties:

- FHRK-certified
- The cold shrink-fit method is used on the outside of the building

Material:

- System cover with socket: polycarbonate
- Clamping nut: PC/PBT blend
- Shrink tubing: EPDM
- Centring strap: EPDM

Tightness:

- gastight and watertight to 2.5 bar

| | |
|---------------------------------------|-------|
| Socket diameter: | 80 |
| Number of cables/medium: | 1 |
| Area of application cable OD (mm): | 38-78 |

