

Membrane injection system

for buildings without a basement

MIS40S 1x9-12 Set10

: 3030380168, GTIN: 4052487229876



- **Universal building entry with membrane injection system for drill holes in the most common types of wall**
- **Controlled ejection of resin through slit membrane hose**
- **Sealing lips ensure gentle seal for media lines**



Suitable for sloping entry through the wall or floor slab.

Advantages:

- Quick to assemble in just a few minutes
- Not necessary to restore basement seal to DIN 18533

Scope of delivery:

- 1 packing unit:
- 10 pieces MIS 40S
- 10 pieces wall terminator element
- 10 pieces 2-component resin RESINATOR, 150 ml
- 1 piece quick tensioning device MIS40 SVS

Dimensions:

- For core drills ID: 40 - 50 mm
- Overall length: 1300 mm

Application range:

- DIN 18533 W1-E
- Waterproof concrete stress class 1, waterproof concrete stress class 2


Material:

- Flange and counter-bearing
- Resin filler hose: PE
- Pipe: PVC-U
- Wall terminator element: Flame-retardant polycarbonate
- Fast arrangement fixture: glass fibre reinforced polyamide/ABS

Tightness:


- gastight and watertight to 1.0 bar

| | |
|-----------------------------------|-------------|
| Number of cables/medium: | 1 |
| Suitable for medium pipe OD (mm): | 9 - 12 |
| Overall length (mm): | 1300 |
| wall thickness (mm): | 200 - 1.200 |





Cartridge gun

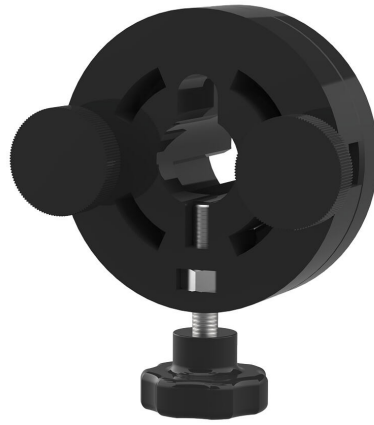

Quick tensioning device